



445-968

Beverages



Caravell Product Line for Beverages

Developed to guarantee the success of your brand, the Caravell Beverages Line combines performance and technology with the perfect exposure.

This line is composed by Upright, Horizontal and Impulse models with a cooler capacity between 0°C and 12°C, ideal for storage of juice, water, soft drinks, energy drinks and beverages in general.

Find out about Caravell's design and technology and ensure your products always enjoy the perfect exposure at the point of sale.

Caravell: tradition of innovation, always offering the best design in quality and performance.



445-968


- **Foamed solid sliding lids**
- **Built-in handles**
Handles are screwed directly into the lids.
- **Aluminium inner liner**
- **Strong castors***
Produce smooth and more controllable movement.
- **Wide assortment of baskets***
Baskets with dividers allow good arrangement of the products.
- **Adjustable thermostat**
- **Automatic defrost**
- **Branding***
Custom graphics can also be added. The box frame as well as the frames of the lids are available in different colours.
- **Light canopy***
Helps spotlight your brand and adds attention at the point of sale.
- **Lid lock***
Avoids undesirable openings and secures the products inside.
- **Internal light***
Allowing good product visibility.
- **Thermometer***
Informs you about internal temperature.



FOAMED SOLID SLIDING LIDS



BUILT-IN HANDLES



ALUMINIUM INNER LINER



STRONG CASTORS



BRANDING*

| LOADING CAPACITY | | | |
|------------------|-----|--|--|
| Pet 500ml | 413 | | |

* Options

DIMENSIONS



Capacity

| | |
|-----------------------------|-------------|
| Gross (liters / cubic feet) | 428 / 15.11 |
| Net (liters / cubic feet) | 386 / 13.63 |

External dimensions

| | |
|----------------------|--------------|
| Width (mm / inches) | 1305 / 51.37 |
| Height (mm / inches) | 895 / 35.23 |
| Depth (mm / inches) | 650 / 25.59 |

Internal dimensions

| | |
|-----------------------|--------------|
| Width (mm / inches) | 1185 / 46.65 |
| Height* (mm / inches) | 737 / 29.01 |
| Depth (mm / inches) | 527 / 20.74 |

Weight

| | |
|----------|------|
| Net (kg) | 61.5 |
|----------|------|

* Not considered the compartment for the compressor.



TRANSPORTATION



Packaging

| | |
|----------------------|--------------|
| Width (mm / inches) | 1350 / 53.14 |
| Height (mm / inches) | 960 / 37.79 |
| Depth (mm / inches) | 750 / 29.52 |

Loading container

| | |
|---------|---|
| 20 feet | - |
| 40 feet | - |


Piling up

| | |
|---------|---|
| Maximum | - |
|---------|---|

Weight

| | |
|------------|---|
| Gross (kg) | - |
|------------|---|

REAL SIZE

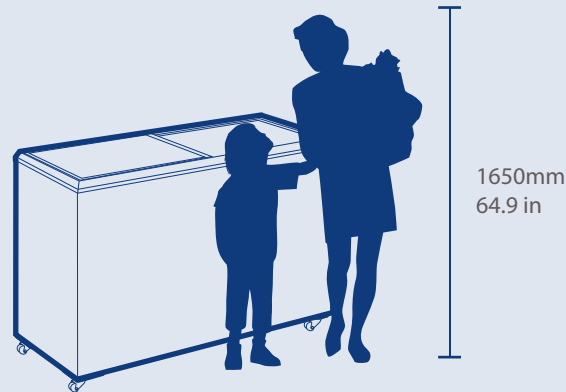

TEMPERATURE RANGE



| | |
|------------------------|--------------|
| Temperature range (°C) | 2 to 12 |
| Temperature range (°F) | 35.6 to 53.6 |
| Climate class | 4+ |

TECHNOLOGY



| | |
|-----------------------------------|---|
| Type of evaporator | - |
| Type of refrigeration agent (gas) | - |

POWER



| | |
|------------------------------|-------------|
| Voltage / Frequency | 120V - 60Hz |
| Voltage / Frequency | 220V - 60Hz |
| Voltage / Frequency | 230V - 50Hz |
| Power (W) | 270 |
| Energy consumption (KWh/24h) | 4.93 |

MERCHANDISING AREA



| Lateral | | Front | |
|-------------|---|-------------|---|
| Width (mm) | - | Width (mm) | - |
| Height (mm) | - | Height (mm) | - |

OPTIONS



- Custom Graphics
- Internal Light
- Castor
- Lid Lock
- Thermometer